

TARAY INTERNATIONAL CORPORATION

INJECTION (BR) BLADDERS

INJECTION (BR) BLADDERS										
Bladder Code	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B145R12-2	145/165R12/13	Pebble	332	450	228	5.2	7.0	224	21.0	12.0
B145R12-3		Pebble	334	465	235	5.0	7.5	224	21.0	13
B155R12-1		Pebble	310	408	240	5.0	7.0	224	21.0	12
B155R13-2		Pebble	350	430	274	5.0	8.0	224	23.0	12
B155R13-3		Pebble	330	440	250	5.0	7.5	234	21.0	12.0
B165R13-3	145/175R13	Pebble	316	440	235	4.0	7.5	234	21.0	12.0
B165R13-4		Pebble	364	450	281	4.0	7.5	234	21.0	12
B165R13-4 (2)		Pebble	364	450	281	5.0	7.5	234	21.0	12
B175R13-2	165/75R13、175/75 (70) R13、 185/70R13	Pebble	380	460	300	4.0	10.0	234	21.0	12.0
B175R13-2 (2)	165/75R13、175/75 (70) R13、 185/70R14	Pebble	380	460	300	5.0	10.0	234	21.0	12.0
B175R13-3	155R13LT/165(175)/70R13	Pebble	376	460	286	4.5	7.0	224	21.0	12.5
B175R13-3 (2)	155R13LT/165(175)/70R13	Pocked	376	460	286	4.5	7.0	224	21.0	12.5
B185R14-2	195/60R14 185/60R14 195/50R15	Pebble	380	430	316	4.8	9.6	260	21.4	11.7
B185R14-3	155/195R14	Pebble	338	460	256	4.5	10.0	260	21.0	12.0
B185R14-4		Pebble	400	460	312	4.5	8.0	224	23.0	12.5
B195R14-1	185/195/60R14	Pebble	370	460	294	4.5	9.5	250	22.0	13.0
B195R14-2		Pebble	420	480	320	4.5	8.0	224	23.0	12.5
B205R14-2	165/205R14/15	Pebble	375	490	276	5.0	7.0	248	21.0	12.0
B205R14-2 (2)	165/205R14/15	Pocked	375	490	276	5.0	7.0	248	21.0	12.0
B205R14-3	205/70(75/80)R14	Pebble	442	510	342	4.0	7.0	248	21.0	12.0

TARAY INTERNATIONAL CORPORATION

INJECTION (BR) BLADDERS

Bladder Code	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
BR14-1		Pebble	374	470	266	5.0	9.5	250	22.0	13
RB14-2		Pebble	420	520	300	4.2	9.5	250	22.0	14.0
RB14-2 (2)		Pebble	420	520	300	5.0	9.5	250	22.0	14.0
B10X250X460		Pebble	331	460	250	5.3	9.0	250	22.0	14.0
B10X270X460		Pebble	351	460	270	5.3	9.0	250	22.0	14.0
B10X270X410		Pebble	315	410	270	4.8	9.0	250	22.0	14.0
B10"X300X470-1		Pebble	388	470	300	5.3	9.0	250	22.0	14.0
B10"X300X470-2		Pebble	388	470	300	4.8	9.0	250	22.0	14.0
B10"X350X470-1		Pebble	438	470	350	5.3	9.0	250	22.0	14.0
B10"X350X470-2		Pebble	438	470	350	4.8	9.0	250	22.0	14.0
B14X310X560		Pebble	390	560	310	5.0	9.0	350	22.0	14.0
B14X350X560		Pebble	430	560	350	5.3	9.0	350	22.0	14.0
B14X350X560-2		Pebble	430	560	350	5.3	9.0	350	22.0	14.0
B14X340X610		Pebble	443	610	340	5.0	9.0	350	22.0	14.0
B14X370X610		Pebble	473	610	370	5.0	9.0	350	22.0	14.0
B14X400X610		Pebble	503	610	400	5.0	9.0	350	22.0	14.0
B14X340X610-2		Pebble	443	610	340	5.0	9.0	350	22.0	14.0
B14X370X610-2		Pebble	473	610	370	5.0	9.0	350	22.0	14.0
B14X400X610-2		Pebble	503	610	400	5.0	9.0	350	22.0	14.0
B15X300X600		Pebble	402	600	300	5.0	9.0	375	22.0	14.0
B15X350X600		Pebble	452	600	350	4.5	9.0	375	22.0	14.0
B15X350X620		Pebble	463	620	350	4.5	9.0	375	22.0	14.0

TARAY INTERNATIONAL CORPORATION

INJECTION (BR) BLADDERS

Bladder Code	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
P408		Pebble	394	495	316	6.4	9.5	286	21.4	11.6
P350		Pebble	324	444	228	4.0	9.5	235	21.4	11.7
P327		Pebble	311	406	203	4.0	9.5	197	21.4	11.7
P420		Pebble	400	508	342	6.4	9.5	311	21.4	11.6
B155R15-1 (2)	155R15	Pocked	364	508	266	5.0	9.6	285.7	21.4	11.7
B195R15-1		Pebble	344	450	278	5.0	10.0	285	21	11.7
B195R15-2		Pebble	413	490	345	5.0	7.0	277	21.0	13.0
B205R15-1	195/65R15、205/60(70/75)R15	Pebble	420	546	305	4.2	9.0	277	21.0	13.0
B205R15-1 (2)	195/65R15、205/60(70/75)R15	Pebble	420	546	305	6.0	9.0	277	21.0	13.0
B225R15-2	235/75R15	Pebble	508	576	367	4.5	7.0	277	21.0	13.0
B185R16-3	185/215R15/16	Pebble	435	550	325	5.0	7.0	277	21.0	13.0
B205R16-3	195/65R15 205/55R16	Pebble	416	508	322	4.1	9.6	285.7	21.4	11.7
B215R16-1		Pebble	426	500	356	5.0	7.0	300	22.00	12.00
B235R16-2		Pebble	518	588	408	4.5	10.0	299	22.0	13.7
B235R16-2 (2)		Pebble	518	588	408	5.0	10.0	299	22.0	13.7
B235R16-3	215/85R16/235/60R16	Pocked	552	590	404	5.0	7.0	277	21.0	13.0
B225R16-1	225R16	Pebble	480	588	360	5.0	7.0	299	22.0	13.0
B225R16-1 (2)	225R16	Pebble	480	588	360	5.0	7.0	299	22.0	13.0
B225R16-1 (3)	225R16	Pebble	480	588	360	6.0	7.0	299	22.0	13.0
B225R16-1 (4)	225R16	Pocked	480	588	360	5.0	7.0	299	22.0	13.0
B225R16-2	225/60R16	Pebble	464	540	360	4.0	8.5	272	22.0	12.7
B225R16-2 (2)	225/60R16	Pebble	464	540	360	5.0	8.5	272	22.0	12.7

TARAY INTERNATIONAL CORPORATION

INJECTION (BR) BLADDERS

Bladder Code	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B650R16-1		Pebble	485	545	370	6.0	9.5	250	22.0	13.0
B825R16-2	8.25R16	Pocked	550	600	440	6.0	10.0	300	24.0	12.0
B825R16-3	8.25R16	Pebble	550	600	440	6.0	10.0	300	24.0	12.0
B825R16-4	8.25R16	Pocked	562	650	428	6.0	10.0	300	24.0	12.0
B345R16-1		Pebble	760	790	500	6.0	10.0	300	24.0	12.0
B368-D		Pocked	420	448.6	363.6	5.2	10.0	276	20.5	14.2
B368-D		Pocked	420	448.6	363.6	5.2	10.0	276	20.5	14.2
B518-D		Pebble	372	406	323.5	5.2	9.0	276	20.5	14.2
B518-D		Pebble	372	406	323.5	5.2	9.0	276	20.5	14.2
PBR005		Pebble	390	490	300	4.5	6.5	276	23	12.5
PBR007		Pebble	440	520	300	4.5	6.5	276	23	12.5
JY0145		Pebble	370	476	298	4.5	8.0	300	25	14.2
JY1545		Pebble	484	580		4.5	8.0	300	25	14.2
JY1545-2		Pebble	514	580	408	4.5	8.0	300	25	14.2
JY1145		Pebble	406	525	270	4.5	10	300	25	14.2
JS1045		Pebble	448	560	294	4.5	10	300	25	14.2
RB1601		Pebble	460	590	346	6.0	8	310	21	12
RB16-3		Pebble	370	480	308	5.5	8.0	310	21.0	12.0
RBSC1604		Pebble	394	498	326	4.5	8.0	310	21.0	12.0
RBSC1605		Pebble	440	536	370	4.5	8.0	310	21.0	12.0
RB16-10		Pebble	346	460	296	5.5	8.0	310	21.0	12.0
16-J-490	7.50R16/ 8.25R16	Pocked	497	600	385	4.5	13.0	310	25.0	13.0

TARAY INTERNATIONAL CORPORATION

INJECTION (BR) BLADDERS

Bladder Code	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B750R16-1	7.50R16	Pebble	497	600	385	6.0	13.0	310	25.0	13.0
B750R16-2	7.50R16	Pebble	497	600	385	6.0	13.0	310	25.0	13.0
16-J-540	8.25R16	Pebble	544	650	414	4.5	13.0	310	25.0	13.0
B205R17-1	205/45(50)R17 225/45R17	Pebble	372	500	320	4.5	9.6	336.5	21.4	11.7
B205R17-1 (2)	205/45(50)R17 225/45R17	Pebble	372	500	320	6.3	9.6	336.5	21.4	11.7
B205R17-1 (3)	205/45(50)R17 225/45R17	Pocked	372	500	320	6.3	9.6	336.5	21.4	11.7
B205R17-2	205/40R17	Pebble	338	470	300	4.5	8.0	336.5	24.0	12.0
B205R17-2 (2)	205/40R17	Pebble	338	470	300	4.5	8.0	336.5	24.0	12.0
B215R17-1		Pebble	382	500	330	4.5	9.6	336.5	21.4	11.7
B225R17-1(4)		Pebble	427	520.7	366	5.5	9.551	336.55	21.88	11.66
B235R17-1		Pebble	392	516	330	4.5	9.6	336.5	21.88	11.66
B235R17-2		Pebble	500	610	398	4.5	9.6	336.5	21.88	11.66
B255R17-1		Pebble	460	540.7	398	4.5	9.6	336.5	21.4	11.7
B255R17-1 (2)		Pebble	460	540.7	398	5.5	9.6	336.5	21.4	11.7
B265R17-1		Pebble	520	620	412	4.5	9.5	336	21.00	12.00
B235R17.5-1		Pocked	506	590	406	6.0	11.0	300	26.0	14.0
18-J-378	235/45R18	Pocked	393	530	340	4.0	11.0	360	24.8	13.2
B235R18-2	235/50(60、55) R18	Pebble	432	572	356	4.5	9.6	360	21.88	11.66
B235R18-2 (2)	235/60R18	Pebble	462	572	386	4.5	9.6	360	21.88	11.66
B235R18-2 (3)	235/50(60、55) R18	Pebble	432	572	356	5.5	9.6	360	21.88	11.66
B235R18-2 (4)		Pebble	432	572	356	4.5	9.6	360	21.88	11.66
18A	225/40R18	Pebble	372	496	326	6.0	8.0	356	23.0	12.0

TARAY INTERNATIONAL CORPORATION

INJECTION (BR) BLADDERS

INJECTION (BR) BLADDERS										
Bladder Code	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
18B	215/35R18	Pebble	337	480	296	6.0	8.0	356	23.0	12.0
B215R19-2		Pebble	334	500	288	5.0	7	380	24	12.7
B235R19-1		Pebble	360	500	314	5.0	7	380	24	12.7
B245R19-1		Pebble	458	562	400	4.5	9.6	387	21.88	11.66
B245R19-2		Pebble	380	520	334	4.2	7.0	380	24.00	12.70
B265R19-1		Pebble	473	584	402	4.5	9.6	387	21.88	11.66
B245R19.5-2		Pocked	530	650	414	6.0	11.0	340	26.0	13.0
B265R195-1		Pebble	569	660	440	6.0	12.0	340	26.00	13.00
B435R195-1		Pocked	775	720	628	6.0	12.0	340	26.0	13.0
B445R195-1		Pocked	744	690	608	6.0	12.0	340	26.0	13.0
B245R20-1		Pebble	404	570	346	4.5	8	396	24	12.5
B245R20-1 (2)		Pebble	404	570	346	6.0	8	396	24	12.5
B255R20-1		Pebble	490	600	426	4.5	8	396	24	12.5
B255R20-1 (2)		Pebble	490	600	426	6.0	8	396	24	12.5
B275R20-1		Pebble	460	600	402	4.5	8	403	24	12.7
B285R20-1		Pocked	440	540	402	6.0	8.0	403	24.0	12.7
B285R20-2		Pocked	510	634	440	5.5	8.0	403	24.0	12.7
B900R20-3	9.00R20	Pocked	632	760	490	8.0	12.0	380	26.0	14.0
B1000R20-3	9.00/10.00R20	Pebble	651	815	468	7.8	12.0	380	26.0	14.0
B1000R20-3 (9)	9.00/10.00R20	Pebble	651	815	468	7.8	12.0	380	26.0	14.0
B1000R20-3 (10)	9.00/10.00R20	Pebble	651	815	468	7.8	12.0	380	26.0	14.0
B1000R20-4	9.00/10.00R20	Pocked	651	815	468	7.8	12.0	380	26.0	14.0

TARAY INTERNATIONAL CORPORATION

INJECTION (BR) BLADDERS

Bladder Code	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B1000R20-4 (5)	9.00/10.00R20	Pocked	651	815	468	7.8	12.0	380	26.0	14.0
B1000R20-4 (6)	9.00/10.00R20	Pocked	651	815	468	7.8	12.0	380	26.0	14.0
B1000R20-11	10.00/11.0R20	Pocked	670	830	480	8.0	12.0	380	26.0	14.0
B10-237A	9.00/10.00R20	Pocked	670	815	475	7.8	15.5	360	28.0	15.5
B10-237A		Pocked	692	830	474	8.0	15.5	360	28.0	15.5
20-J-650	10.00/11.00R20	Pocked	650	780	506	6.5	12.7	384.2	28.4	12.7
B411-C		Pocked	732	737	626	8.5	12.5	384	26.5	13.0
B1100R20-1	9.00/10.00/11.00R20	Pebble	670	830	442	9.0	13.0	380	26.0	14.0
B11-272A	9.00/10.00/11.00R20	Pocked	762	830	544	8.0	15.5	360	28.0	15.5
B1100R20-3	11.00R20	Pocked	688	830	480	7.8	13.0	380	26.0	14.0
B1100R20-3 (G)	11.00R20	Pocked	688	830	480	7.8	13.0	380	27.0	14.0
B1100R20-3 (3)		Pocked	688	830	480	9.0	13.0	380	26.0	14.0
20-J-680	11.00R20	Pocked	696	830	496	6.8	12.7	384.2	28.4	12.7
B1200R20-3	11.00/12.00R20	Pebble	740	865	516	7.8	12.0	380	26.0	14.0
B1200R20-3 (2)	11.00/12.00R20	Pebble	740	865	516	7.8	12.0	380	26.0	14.0
B1200R20-3 (9)	11.00/12.00R20	Pebble	740	865	516	7.8	12.0	380	26.0	14.0
B1200R20-3 (10)	11.00/12.00R20	Pebble	740	865	516	7.8	12.0	380	26.0	14.0
B1200R20-4	11.00/12.00R20	Pocked	740	865	516	7.8	12.0	380	26.0	14.0
B1200R20-4 (5)	11.00/12.00R20	Pocked	740	865	516	7.8	12.0	380	26.0	14.0
B1200R20-4 (6)	11.00/12.00R20	Pocked	740	865	516	7.8	12.0	380	28.0	14.0
B1200R20-4 (7)	11.00/12.00R20	Pocked	740	865	516	7.8	12.0	380	26.0	14.0
B1200R20-13	11.00/12.00R20	Pocked	740	865	516	7.8	12.0	380	26.0	14.0

TARAY INTERNATIONAL CORPORATION

INJECTION (BR) BLADDERS

Bladder Code	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B1400R20-2	1400R20/385 (425) /65R22.5	Pebble	840	830	684	8.0	12.0	380	24.0	14.0
B1400R20-3	1400R20	Pocked	822	920	586	8.0	12.0	380	24.0	14.0
B305R22-1		Pebble	500	656	440	4.5	8	454	24	12.7
B305R22-1 (2)		Pebble	500	656	440	6.0	8	454	24	12.7
20A522R		Pocked	522	720	381	6.0	15.5	410	28.0	15.5
B225-170A		Pocked	487	740	340	8.5	15.5	412	28.0	15.0
B225-630A		Pocked	652	812	480	8.0	15.5	412	28.0	15.0
B315R22.5-1		Pocked	710	830	534	8.0	15.5	412	28.0	15.0
B315R22.5-2		Pocked	710	830	534	8.0	15.5	412	29.0	15.0
B425R22.5-1		Pocked	830	880	631	8.0	15.5	412	29.0	15.0
B255R225-1		Pocked	550	720	440	6.0	12.0	432	28.0	14.0
B385R225-2		Pocked	706	772	584	6.0	12.0	432	28.0	14.0
B12R22.5-1 (2)	12R22.5	Pocked	685	830	516	8.0	11.0	432	28.0	14.0
B13R22.5-1	12/13R22.5、315/80R22.5	Pocked	704	830	532	8.0	11.0	432	28.0	14.0
B13R22.5-1	12/13R22.5、315/80R22.5	Pocked	704	830	532	8.0	12.0	432	26.0	14.0
B445R225-1		Pocked	746	790	636	6.0	12.0	432	28.0	14.0
22.5-J-650	11R22.5	Pocked	658	810	516	6.8	12.7	434	28.4	12.7
P447		Pebble	660	810	492	7.2	15.8	419	26.0	15.2
P245		Pebble	695	825	520	7.2	15.8	419	26.0	15.2
B1200R24-2	12.00R24	Pocked	784	940	604	8.0	11.0	470	26.0	14.0
B1200R24-3	12.00R24	Pebble	784	940	604	8.0	11.0	470	26.0	14.0
B255R24-1		Pocked	426	600	384	5.0	8.0	454	24.0	12.7

TARAY INTERNATIONAL CORPORATION



INJECTION (BR) BLADDERS

Bladder Code	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B305R24-1		Pocked	526	660	470	5.5	8.0	454	24.0	12.7
B11R24.5-2	11R24.5	Pocked	670	830	547	8.0	11.0	470	28.0	15.0
B305R26-1		Pebble	440	670	400	5.0	7.0	555	24.00	14.00
270-290x295x475-1		Pebble	387	475	295	5.7	6.0	270/290	18.0	10.0
270-290x295x475-2		Pebble	387	475	295	4.5	6.0	270/290	18.0	10.0
270-290x295x475-3		Pebble	387	475	295	5.0	6.0	270/290	18.0	10.0
270-290x296x515-1		Pebble	398	515	296	5.3	6	270/290	18	10
270-290x296x515-2		Pebble	398	515	296	4.8	6	270/290	18	10
270-290x300x540-1		Pebble	411	540	300	5.3	6	270/290	18	10
270-290x300x540-2		Pebble	411	540	300	4.8	6	270/290	18	10
270-290x300x540-3		Pebble	411	540	300	4.8	6	270/290	18	10
270-290x330x540-1		Pebble	441	540	330	5.3	6	270/290	18	10
270-290x330x540-2		Pebble	441	540	330	4.8	6	270/290	18	10
270-290x330x540-3		Pebble	441	540	330	4.8	6	270/290	18	10
270-290x360x540-1		Pebble	471	540	360	4.8	6	270/290	18	10
270-290x360x540-2		Pebble	471	540	360	5.3	6	270/290	18	10
270-290x360x540-3		Pebble	471	540	360	4.8	6	270/290	18	10
270-290x360x540-4		Pebble	471	540	360	4.8	6	270/290	18	10
270-290x360x540-5		Pebble	471	540	360	5.3	6	270/290	18	10
270-290x380x540		Pebble	491	540	380	5.3	6	270/290	18	10
270-290x400x540		Pebble	511	540	400	4.8	6	270/290	18	10

TARAY INTERNATIONAL CORPORATION

INJECTION (BR) BLADDERS

Bladder Code	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
270-290x400x540-2		Pebble	511	540	400	5.3	6	270/290	18	10
B17X214X560		Pebble	430	560	214	4.0	9.5	170/225	24.5	11
CR15-1		Pebble	463	550	254	5.0	7	276/226	24	12.9
TS2	185/65 (70) R14	Pebble	458	480	307	4.5	7	170/225	24	12
TS3	195/65(70)R14	Pebble	476	500	321	4.5	7	170/225	24	12
HEB13/5	195/65(70)R15	Pebble	499	505	337	4.5	7	170/225	24	12
TS4		Pebble	530	525	359	4.5	7	170/225	24	12
TS4-2		Pebble	550	525	388	4.5	7	170/225	24	12
		Pebble								

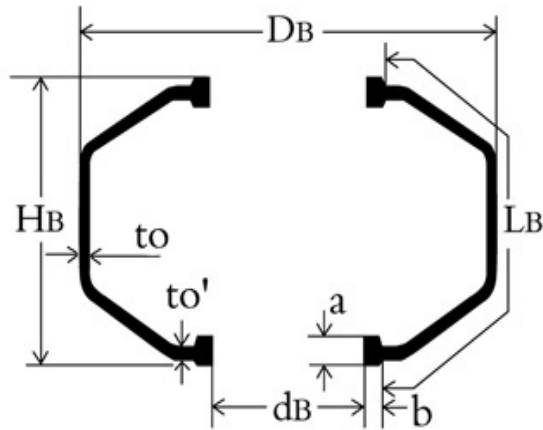

Packing

TARAY INTERNATIONAL CORPORATION

INJECTION (ABR) BLADDERS

Bladder Code	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
A12"X215X500		Pocked	460	500	290	4.5	9.0	300	14.5	15.0
A12"X243X515		Pocked	416	535	310	4.5	9.0	300	14.5	15.0
A12"x250x565		Pocked	484	565	320	4.8	9.0	300	14.5	15.0
A14"X270X530-1		Pocked	475	530	330	4.8	8.5	329	15.0	15.5
A14"X270X530-2		Pocked	475	530	330	4.8	8.5	329	15.0	15.5
A14"X300X550-1		Pocked	509	550	350	4.8	8.5	329	15.0	15.5
A14"X300X550-2		Pocked	509	550	350	4.8	8.5	329	15.0	15.5

TARAY INTERNATIONAL CORPORATION

INJECTION (ABR) BLADDERS

INJECTION (ABR) BLADDERS										
Bladder Code	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
AB155R13-2		Pebble	368	450	245	5	8	250/145	15	15/10
AB165R13-2	165/70R13、155R13LT	Pebble	380	440	330	5	9/8	240/102	14.5/40	16/11
AB165R13-1 (2)	165R13 155R12LT	Pebble	378	460	260	5.5	8.0	262/98	13.5/32.5	14/20.5
AB175R14-1	165(175)/70R14、185/ 60R14	Pebble	407	470	324	5	9/8	240/102	14.5/40	16/11
AB175R14-2	175/65(70)R14	Pebble	398	480	322	5	9/8	285/102	14.5/40	16/11
AB195R14-1	185/70R14、195/60R14	Pebble	434	470	360	5	9/8	240/102	14.5/40	16/11
AB205R14-1	195/65R14、205/75R14	Pebble	460	510	375	5	9/8	285/102	14.5/40	16/11
AB195R14-1 (2)		Pebble	460	486	380	5	9/8	240/102	14.5/40	16/11
AB195R15-1	195/55(60)R15	Pebble	450	490	360	5	9/9	240/102	14.5/40	16/11
AB205R14-1 (2)	205/75R15	Pebble	498	540	396	5	9/8	285/102	14.5/40	16/11
AB235R15-2	215/225/235/75R15、255/60 r16	Pebble	528	560	420	5	9/8	285/102	14.5/40	16/11
AB235R15-3	225/75R15、235/75R15	Pebble	546	580	412	6.3	9/8	285/102	14.5/40	16/11
AB235R16-1	215/235/85R16、225/75R16 、235/80R16	Pebble	572	640	393	5	9/8	285/102	14.5/40	16/11
AB235R16-2	235/80(85)R16	Pebble	596	630	436	6.3	9/8	285/102	14.5/40	16/11
AB650R16-1 (2)	650R16LT、650R16C	Pebble	492	580	345	5	9/8	285/102	14.5/40	16/11
AB650R16-1 (3)	650R16LT、650R16C	Pebble	511	600	344	6.3	9/8	285/102	14.5/40	16/11
AB15/17X540X760		Pebble	824	760	540	8	10/12	386/376	22/23	22/14
RIB16R20 445/65R225	1600R20、445/65R225	Pebble	950	950	786	8	14/8	383/120	23/43	23/14
PD500K		Pebble	620	615	389	5.0	6.9/9.5	231/152	15/21.4	14.5/10.2

TARAY INTERNATIONAL CORPORATION

INJECTION (ABR) BLADDERS

Bladder Code	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
PD601K		Pebble	690	615	459	5.0	6.9/9.6	231/152	15/21.5	14.5/10.3
ZP414K		Pebble	284	514	428	6.35	7.54/9.53	231/152	15/21.5	14.5/10.3
AB1200R20-1		Pebble	752	850	548	8	14/8	383/120	23/43	23/14
AB1400R20-1		Pebble	886	960	611	8	14/8	383/120	23/43	23/14
AB1400R24-1		Pebble	997	1040	692	8	14/8	383/120	23/43	23/14

TARAY INTERNATIONAL CORPORATION

BR/AR/ABR MOULD BLADDERS

INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B135R12-1	135/145R12	Pocked	282	392	223	6.0	10.0	210	21.0	12.0
B145R12-1	145/165R12/13	Pebble	332	450	228	5.7	7.0	224	21.0	12.0
B145R12-1 (3)	145/165R12/13	Pebble	332	450	228	5.7	7.0	224	21.0	12.0
B135R13-1	135/165R13	Pocked	273	415	203	6.2	10.0	234	21.0	12.0
B145R13-1	135/155R13	Pocked	287	421	235	4.5	10.0	234	21.0	12.0
B155R13-1	135/165R13	Pocked	292	420	205	6.2	10.0	234	21.0	12.0
B165R13-1	145/175R13	Pebble	316	440	235	5.0	7.5	234	21.0	12.0
B165R13-2	165/65(70)R13、155R13	Pebble	346	460	260	4.5	10.0	234	21.0	12.0
B175R13-1	165/185R13	Pocked	347	460	265	4.5	10.0	234	21.0	12.0
B185R14-1	155/195R14	Pocked	338	460	256	4.5	10.0	260	21.0	12.0
B205R14-1	165/205R14/15	Pebble	375	490	276	5.0	7.0	248	21.0	12.0
B155R15-1	155R15	Pebble	364	508	265.8	4.1	6.6	285.7	21.4	11.7
B225R15-1	235/75R15\225/75R16	Pocked	508	576	367	5.0	7.0	277	21.0	13.0
B185R16-1	185/215R15/16	Pebble	435	550	325	5.0	7.0	277	21.0	13.0
B185R16-2	185/215R15/16	Pebble	435	550	325	5.0	7.0	277	21.0	13.0
B205R16-1	205/215R16/17/18	Pebble	426	438	394	6.0	7.0	304	23.3	12.8
B205R16-1	205/215R16/17/18	Pebble	426	438	394	4.5	7.0	304	23.3	12.8
B205R16-2	195/65R15 205/55R16	Pebble	416	508	322	4.06	9.6	285.7	21.4	11.66
B205R16-2 (3)	195/65R15 205/55R16	Pebble	416	508	322	6.30	9.6	285.7	21.4	11.66
B205R16-2 (2)	195/65R15 205/55R16	Pebble	416	508	322	4.06	9.6	285.7	21.4	11.66
B235R16-1	215/85R16/235/60R16	Pebble	552	590	404	5.0	7.0	277	21.0	13.0
B265R16-1	LT245R17\LT265/75R16	Pocked	570	620	389	5.0	7.0	277	21.0	13.0

TARAY INTERNATIONAL CORPORATION

BR/AR/ABR MOULD BLADDERS

INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B825R16-1	8.25R16	Pebble	550	600	440	7.0	10.0	300	24.0	12.0
B225R17-1	225/50R17	Pebble	424	520.7	368	4.5	9.551	336.55	21.88	11.66
B225R17-1(2)	225/55R17	Pebble	427	520.7	366	4.5	9.551	336.55	21.88	11.66
B225R17-1(3)	225/55R17	Pebble	427	520.7	366	5.5	9.551	336.55	21.88	11.66
B235R18-1	225/40R18	Pebble	390	490	338	4.5	9.551	336.55	21.88	11.66
B255R18-1	255/265/35R18、235/245/35R19	Pocked	414	500	368	6.0	8.0	353	24.0	12.9
B255R18-2	255/45R18、235/50R18	Pocked	450	544	390	6.0	8.0	353	24.0	12.9
B215R19-1	215/225/35R19	Pocked	385	500	350	6.0	8.0	378	24.0	12.7
B245R19.5-1	24.5/70R19.5	Pebble	548	648	438	7.0	11.0	340	26.0	14.0
B225R20-1	225/35R20	Pocked	378	528	338	6.0	8.0	403	24.0	12.7
B825R20-1	8.25R20	Pebble	574	790	342	7.0	12.0	378	24.0	14.0
B825R20-2	8.25R20	Pocked	574	790	342	8.0	12.0	378	24.0	14.0
B900R20-1	9.00/10.00R20	Pebble	651	760	500	9.5	12.0	380	24.0	14.0
B900R20-2	9.00/10.00R20	Pocked	651	760	500	8.0	12.0	380	24.0	14.0
B900R20-2 (2)	9.00/10.00R20	Pocked	651	760	500	8.0	12.0	380	26.7	14.0
B1000R20-1	9.00/10.00R20	Pebble	651	815	452	7.6	12.0	380	24.0	14.0
B1000R20-2	9.00/10.00R20	Pocked	651	815	452	8.0	12.0	380	24.0	14.0
B1000R20-8	9.00/10.00R20	Pocked	651	815	452	9.0	12.0	380	24.0	14.0
B20/635	9.00/10.00-20	Pocked	635	571.5	587	9.5	12.7	384.2	28.4	12.7
B3	10.00R20 11.00R20	Pocked	693	571.5	644	9.5	12.7	384.2	28.4	12.7
B1200R20-1	11.00/12.00R20	Pebble	740	865	500	7.7	12.0	380	24.0	14.0
B1200R20-1(2)	11.00/12.00R20	Pebble	740	865	500	7.7	12.0	380	24.0	14.0

TARAY INTERNATIONAL CORPORATION

BR/AR/ABR MOULD BLADDERS

INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B1200R20-1(3)	11.00/12.00R20	Pebble	740	865	500	9.2	12.0	380	24/22	14.0
B1200R20-2	11.00/12.00R20	Pocked	740	865	500	8.0	12.0	380	24.0	14.0
B1200R20-2(2)	11.00/12.00R20	Pocked	740	865	500	8.0	12.0	380	24.0	14.0
B1200R20-2(4)	11.00/12.00R20	Pocked	740	865	500	8.0	12.0	380	24.0	14.0
B1200R20-8	11.00/12.00R20	Pocked	740	865	500	9.0	12.0	380	24.0	14.0
B1200R20-11	11.00/12.00R20	Pebble	740	865	500	7.6	12.0	380	24.0	14.0
B1400R20-1	1400R20/385 (425) /65R22.5	Pebble	840	830	684	8.0	12.0	380	24.0	14.0
B1400R20-1(2)	1400R20/385 (425) /65R22.5	Pebble	840	830	684	8.0	12.0	380	24.0	14.0
B295R22-1	295/45R22	Pocked	525	627	278	6.2	9.5	419	21.4	11.7
B385R22.5-1	385/55(65)R22.5	Pebble	758	680	670	9.0	12.0	380	24.0	14.0
B1200R24-1	12.00R24	Pocked	784	940	604	8.0	11.0	470	26.0	14.0
B11R24.5-1	11.00R24.5/12.00R24.5	Pebble	670	830	547	8.0	11.0	470	28.0	15.0
A135R12-1	135/145R12	Pocked	321	450	255	4.5	8.0	261	12.5	14.5
A145R12-1	145/155R12	Pebble	344	460	240	6.0	8.0	261	12.5	13.0
A155R13-1	145/175R13/14	Pocked	376	470	304	4.5	8.0	261	12.5	14.5
A165R13-1	155/185R13/14	Pocked	420	510	304	4.5	8.0	261	12.5	14.5
A195R15-1	165/195R15/16	Pebble	446	540	304	4.5	8.0	261	12.5	14.5
A205R15-1	185/215R15/16	Pocked	485	570	304	4.5	8.0	261	12.5	14.5
A235R16-1	235R16	Pebble	497	590	342	5.7	8.2	310	12.5	16.0
A215R17-1	215/205/40R17	Pocked	466	483	365	5.5	9.0	285	14.5	15.0
A215R18-1	215R18	Pocked	489	483	379	5.5	9.0	285	14.5	15.0

TARAY INTERNATIONAL CORPORATION

BR/AR/ABR MOULD BLADDERS

INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
AB155R13-1	165R13 155R12LT	Pocked	365	480	280	5.5	7.5	262/98	13.5/32.5	14/20.5
AB165R13-1	165R13 155R12LT	Pebble	378	460	260	5.5	8.0	262/98	13.5/32.5	14/20.5
AB185R14-1	155/185R13/14	Pocked	394	470	275	5.5	6.5	262/102	13.5/41	14/13.5
AB185R15-1	165/185R14/15	Pocked	449	500	315	5.5	6.5	262/102	13.5/41	14/13.5
AB185R16-1	185/205R15/16	Pocked	536	560	355	5.5	6.5	262/102	13.5/41	14/13.5
AB1000R20-1	9.00/10.00R20	Pocked	687	864	450	9.5	13.5	408.8/50	20/86.8	23.6/46

TARAY INTERNATIONAL CORPORATION

B / A MOULD BLADDERS

INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B9×350-4-1	9×3.50-4	Pebble	173	128	156	5.0	7.0	68	16.0	8.0
B350-4-1	3.50/4.10-4	Pebble	188	135	166	5.0	7.0	68	16.0	8.0
B410-4-1	3.50/4.10-4	Pebble	230	116	202	5.0	7.0	42	16.0	7.0
B11X400-5-1	11X4.5、10X4.5-5	Pebble	218	140	200	6.0	6.0	67	16.0	6.0
B11X710-5-1	11X7.10-5	Pebble	311	145	284	5.0	6.0	67	16.0	6.0
B13×500-6-1	13×5.00-6	Pebble	260	160	238	7.5	8.5	84	19.0	9.0
B13×500-6-1(2)	13×5.00-6	Pebble	260	160	238	7.5	8.5	84	19.0	9.0
B13×600-6-1	13×6.00-6 145-6	Pocked	310	165	288	7.5	8.5	84	19.0	9.0
B13×650-6-1	13×6.50-6 5×6.00-6	Pebble	340	165	312	7.5	8.5	84	19.0	9.0
B13×650-6-2	13×6.50-6 5×6.00-6	Pebble	340	165	312	7.5	8.5	84	19.0	9.0
B16X8-7-1	16X8-7	Pebble	348	190	320	6.0	8.0	96	15.0	8.0
B16X8-7-2	16X8-7	Pebble	372	190	334	6.0	8.0	96	15.0	8.0
B16X7-8-1	16X7-8、16X6-8	Pebble	358	230	320	6.0	9.0	114	22.0	11.5
B18×850-8-1	18×8.50-8 18×9.50-8	Pebble	440	220	410	7.5	8.5	114	22.0	12.0
B300		Pebble	400	220	368	6.0	8.5	114	22.0	12.0
B20X10-9-1	20X10-9、20X11-9	Pebble	490	290	450	6.0	9.0	165	18.0	10.0
B14X1.25-10-1	14X1.25-10	Pebble	150	260	118	5.0	7.0	183	14.0	9.0
B300-10-1	3.0-10	Pebble	230	245	208	5.0	7.0	183	14.0	9.0
B350-10-1	3.50-10	Pebble	270	246	250	6.0	6.0	183	15.0	6.0
B22X7-10-1	21 (22/23) X7-10	Pebble	384	290	339	6.0	9.0	165	22.0	8.0
B22×11-10-1	22×11-10	Pebble	530	320	482	8.0	9.0	166	24.0	12.0
B20×14-10-1	20×14-10	Pebble	550	296	475	6.0	7.0	157	15.0	10.0

TARAY INTERNATIONAL CORPORATION

B / A MOULD BLADDERS

INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B10F		Pocked	195	284	178	5.5	7.0	190	17.0	11.0
B450-12-1	4.5-12	Pebble	300	310	274	7.0	9.0	228	18.0	9.0
B500-12-1	5.0-12	Pebble	328	310	304	7.0	9.0	228	18.0	9.0
B500-12-1	5.0-12	Pebble	328	310	304	7.0	9.0	228	18.0	9.0
B600-12-1	6.0-12	Pebble	342	320	320	7.0	9.0	228	18.0	9.0
B24X8-12-1	24X8-12	Pebble	443	330	410	8.0	11.0	220	21.0	12.5
B25X11-12-1	25X11-12、25X10-12	Pebble	548	360	502	6.0	9.0	220	22.0	12.5
B25X12-12-1	25X12-12	Pebble	592	360	546	6.0	9.0	220	22.00	12.50
B275-14-1		Pocked	191	365	164	5.0	7.0	280	16.0	8.0
B1500-15-1	15.00-15	Pocked	628	500	580	7.0	10.0	310	24.0	12.0
B1600-15-1	16.00-15	Pebble	744	500	698	7.0	10.0	310	24.0	12.0
B250-16-1		Pocked	133	410	109	5.0	7.0	340	16.0	8.0
B650-16-1	6.50-16	Pebble	446	420	410	8.2	10.0	260	24.0	12.5
B650-16-2	6.50-16	Pocked	446	420	410	8.2	10.0	260	24.0	12.5
B700-16-1	7.00-16	Pocked	430	445	402	7.5	8.5	310	23.5	11.5
B750-16-1	7.50-16	Pebble	494	490	440	8.0	8.0	310	24.0	12.5
B750-16-2	7.50-16	Pocked	494	490	440	8.0	8.0	310	24.0	12.5
B11L-16-1	11L-16	Pocked	550	485	498	10.0	12.0	320	26.0	14.0
B10-16.5-1	10-16.5	Pocked	525	445	464.9	7.0	9.1	277	21.8	12.7
B400-17-1		Pocked	206	472	164	5.0	7.0	360	16.0	8.0
B300-18-1	2.75/3.00-18	Pocked	188	455	159	5.0	6.0	385	13.0	4.0
B325-19-1	3.25-19	Pebble	241	470	220	5.0	6.5	408	13.5	9.0

TARAY INTERNATIONAL CORPORATION

B / A MOULD BLADDERS

INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B825-20-1	8.25-20	Pebble	558	500	518	9.5	13.0	360	27.5	14.5
B900-20-1	9.00-20	Pebble	642	608	568	9.5	12.0	360	28.0	14.0
B900-20-1 (JG)	16/70-20	Pebble	782	608	708	9.5	12.0	360	28.0	14.0
B900-20-2	9.00-20	Pocked	642	608	568	9.5	12.0	360	28.0	14.0
B900-20-3	9.00-20	Pocked	652	580	600	10.0	12.5	360	28.0	14.0
B1000-20-1	9.00/10.00-20	Pebble	649	602	584	9.2	12.0	380	28.0	14.0
B1000-20-2	9.00/10.00-20	Pebble	649	602	584	9.2	12.0	380	28.0	14.0
B1100-20-1	11.00-20	Pebble	706	634	630	9.5	12.0	380	28.0	14.0
B1100-20-2	11.00-20	Pocked	704	630	626	11.5	12.5	380	28.0	14.0
B1400-20-1	14.00-20	Pebble	910	660	846	9.0	14.5	380	30.0	15.0
B1600-20-1	16.00-20	Pebble	990	700	904	8.0	12.0	380	28.0	14.0
B350-21-1		Pocked	200	570	162	5.0	7.0	460	16.0	8.0
B2100-21-1	21.00-21		901	740	756	10	13	384	28	15
B11-225-1	11-22.5	Pebble	692	630	610	11.5	13.5	370	28	13
B1200-24-1	12.00-24	Pebble	732	730	650	10.5	14.0	470	28.0	14.0
B1200-24-2	12.00-24	Pebble	732	730	650	10.5	14.0	470	28.0	14.0
B1200-24-3	12.00-24	Pebble	780	714	708	10.0	14.0	470	28.0	14.0
B175L-24-1	16.9L/17.5L-24	Pebble	820	665	733	10.0	15.0	465	29.0	15.0
B195L-24-1	19.5L-24	Pebble	920	695	819	10.0	15.0	465	29.0	15.0
B175-25-1	17.5-25	Pebble	858	770	766	10.5	14.0	470	28.0	14.0
B175-25-2	17.5-25	Pebble	858	770	766	12.0	14.0	470	28.0	14.0

TARAY INTERNATIONAL CORPORATION


B / A MOULD BLADDERS

INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B175-25-3	17.5-25	Pebble	876	714	802	16.0	18.0	470	36.0	15.5
B175-25-4	17.5-25	Pebble	924	714	850	9.5	13.0	470	28.0	12.5
B175-25-4(2)	17.5-25	Pebble	924	714	850	13.0	13.0	470	28.0	12.5
B205-25-1	20.5-25	Pebble	996	880	865	15.5	18.0	470	36.0	18.0
B205-25-2	20.5-25	Pebble	996	880	865	15.5	18.0	470	36.0	18.0
B205-25-3	20.5-25	Pebble	1097	830	990	15.0	22.5	470	38.0	15.5
B235-25-1	23.5-25	Pebble	1025	890	876	15.5	18.0	470	36.0	15.0
B235-25-2	23.5-25	Pebble	1213	830	1100	14.0	22.5	470	36.0	14.5
B235-25-2 (3)	23.5-25	Pebble	1213	830	1100	14.0	22.5	470	36.0	14.5
B235-25-4	23.5-25	Pebble	1213	830	1100	14.0	22.5	470	36.0	14.5
B265-25-1	26.5-25	Pebble	1460	890	1350	14.0	23.0	470	36.0	15.5
B265-25-2	26.5-25	Pebble	1356	890	1230	14.0	23.0	470	36.0	15.5
B295-25-1	29.5-25	Pebble	1520	916	1402	14.0	23.5	470	38.0	15.0
BOM-Z-2203		Pebble	148	569	126	4.5	5.5	498	14.0	8.3
BOM-Z-622-02		Pebble	80	620	59	3.5	5.0	565	14.0	8.0
BOM-Z-622-02		Pebble	80	620	59	4.5	5.0	565	14.0	8.0
BOM-Z-622-02 (2)		Pebble	80	620	59	3.5	5.0	565	14.0	8.0
BOM-Z-622-02 (3)		Pebble	80	620	59	3.5	5.0	565	14.0	8.0
BOM-Z-622-04		Pebble	110	625	93	3.8	5.5	555	14.5	9.0
BOM-Z-622-06		Pebble	143	632	119	3.8	5.5	555	14.5	9.0
BOM-Z-630-02		Pebble	84	627	64	3.5	5.0	565	14.0	8.0

TARAY INTERNATIONAL CORPORATION

B / A MOULD BLADDERS

INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
BOM-Z-630-03		Pebble	98	627	76	3.5	5.0	565	14.0	8.0
BOM-Z-584		Pebble	152	594	126.5	4.5	5.5	520	14.0	8.1
BOM507-05		Pebble	142	520	104	3.5	5.5	445	14.5	8.0

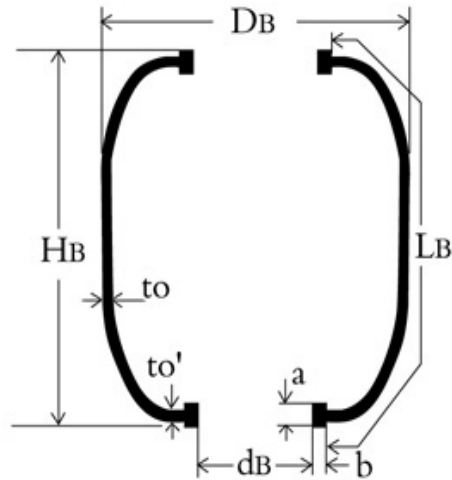

TARAY INTERNATIONAL CORPORATION

OTR RADIAL BLADDERS

OTR RADIAL BLADDERS										
INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B175R25-1	175R25	Pebble	858	1025	632	9.0	16.0	512	36.0	16.0
B205R25-1	20.5R25	Pebble	981	1080	730	11.0	16.0	512	36.0	16.0
B235R25-1	23.5R25	Pebble	1075	1140	760	11.0	16.0	512	36.0	16.0
B265R25-1	26.5R25	Pebble	1298	1180	1040	11.0	16.0	512	36.0	16.0
B295R25-1	29.5R25	Pebble	1450	1330	1110	11.0	16.0	512	36.0	16.0
B33.25R29-1	33.25R29	Pebble	1655	1540	1194	12.0	22.23	571.5	38.1	15.24
B1800R33-1	18.00R33	Pebble	1122	1340	786	12.0	22.23	647.7	38.1	15.24
B35R33-1	35/65R33	Pebble	1546	1420	1280	12.0	22.23	647.7	38.1	15.24
B2400R35-1	24.00R35	Pebble	1478	1550	1066	12.0	22.20	647.7	38.1	15.24
B2700R49-1	27.00R49	Pebble	1700	2060	1106	13.0	22.23	952.5	38.1	15.24
B3300R51-1	33.00R51	Pebble	2050	2200	1456	13.0	22.23	952.5	38.1	15.24
B3600R51-1	36.00R51	Pebble	2256	2450	1430	13.0	22.23	952.5	38.1	15.24
B3700R57-1	37.00R57	Pebble	2300	2540	1640	13.0	22.23	1135	38.1	15.24
B4000R57-1	40.00R57	Pebble	2800	2600	2126	13.0	22.23	1135	38.1	15.24
B4000R57-2	40.00R57	Pebble	2586	2765	2000	20.0	26.00	1310	40.0	20.00
B50R57-1	50.00/80R57	Pebble	2700	2760	1936	13.0	22.23	1135	38.1	15.24
B59R63-1	59/85R63	Pebble	2856	2765	2270	20.0	26.00	1310	40.0	20.00

TARAY INTERNATIONAL CORPORATION

OTR BIAS BLADDERS

INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B29.5-29-1	29.5-29	Pebble	1583	1111.25	1464	15.00	22.23	571.5	38.1	15.24
B1800-33-1	18.00-33	Pebble	1165	958.85	1092	15.88	22.23	647.7	38.1	15.24
B1800-33-1 (JG)	2100-35	Pebble	1345	959.85	1272	15.88	22.23	647.7	38.1	15.24
B35-33-1	35/65-33	Pebble	1688	1085.9	1590	15.00	22.23	647.7	38.1	15.24
B2400-35-1	24.00-35	Pebble	1418	1016	1336	15.88	22.23	647.7	38.1	15.24
B37.25-35-1	37.25-35	Pebble	1849	1200	1736	15.00	22.23	647.7	38.1	15.24
B45-45-1	45/65-45	Pebble	2140	1364	2054	15.00	22.23	901.7	38.1	15.24
B2400-49-1	24.00-49	Pebble	1342	1193.8	1277	15.00	22.23	952.5	38.1	15.24
B2700-49-1	27.00-49/30.00-51	Pebble	1676	1371.6	1590	15.88	22.23	952.5	38.1	15.24
B3600-51-1	33.00-51/36.00-51	Pebble	2079	1384.3	1996	15.88	22.23	952.5	38.1	15.24
B37.00-57-1	37.00-57	Pebble	2280	1800.0	2080	15.00	22.23	1135	38.1	15.24
B4000-57-1	40.00-57	Pebble	2650	1800	2460	15.0	22.2	1135	38.1	15.2
B53-63-1	53/80-63	Pebble	2820	2000	2588	15.0	22.2	1135	38.1	15.2

TARAY INTERNATIONAL CORPORATION

AGRICULTURAL BLADDERS

INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B9340		Pebble	902	584	850	11	15.00	305	31.8	12.70
B9341		Pebble	1002	584	950	11	15.00	305	31.8	12.70
B8.3-24-1	8.3-24	Pebble	450	660	380	12	14.00	470	28.0	14.00
B11.2-24-1	9.5-24/11.2-24	Pebble	540	660	460	12	14.00	470	28.0	14.00
B11-28-1		Pebble	628	724	560	12	12.00	530	28.0	14.00
B14.9-30-1	14.9-30	Pebble	765	890	662	12.0	16	600	29	14.00
B14.9-30-1 (2)	14.9-30	Pebble	765	890	662	13.0	16	600	29	14.00
B16.9-30-1	16.9-30	Pebble	860	900	758	10	16.00	600	29.0	14.00
B18.4-30-1	18.4-30	Pebble	930	900	828	10	16.00	600	29.0	14.00
B11-32-1	11-32	Pebble	624	900	551	12.0	12.7	678	29	13.5
B16.9-34-1	16.9-34	Pebble	842	900	756	10	15.30	716	30.0	16.00
B18.4-34-1	18.4-34	Pebble	914	916	824	10	15.50	716	30.0	16.00
B12.4-38-1	11.2-38 12.4-38	Pebble	687	1020	634	10	11.20	827	25.0	12.50
B18.4-38-1	18.4/15-38	Pebble	910	1020	838	10	13.50	827	25.0	12.00
BK325		Pebble	695	1120	596.4	15	12.50	825	23.5	14.00
BK327		Pebble	840	1120	741.4	15	12.50	825	23.5	14.00
BK329		Pebble	945	1120	846.4	15	12.50	825	23.5	14.00
B18.4-42-1	18.4-42	Pebble	975	1120	904	10	16.00	850	36.0	15.00
B4246		Pebble	1046	1030	955	13	16	843	33.8	16.00
BK4650		Pebble	1101	1200	1020	12.5	14	975	34	16

TARAY INTERNATIONAL CORPORATION

NEW BLADDER SIZES

INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
P420		Pebble	400	508	342	6.4	9.5	311	21.4	11.6
18A		Pebble	372	496	326	6.0	8.0	356	23.0	12.0
P245	12/13R22.5、315/80R22.5	Pebble	695	825	520	7.2	15.8	419	26.0	15.2
B1200R24-3	12.00R24	Pebble	784	940	604	8.0	11.0	470	26.0	14.0
TS2	185/65 (70) R14	Pebble	458	480	307	4.5	7	170/225	24	12
TS3	195/65(70)R14	Pebble	476	500	321	4.5	7	170/225	24	12
HEB13/5	195/65(70)R15	Pebble	499	505	337	4.5	7	170/225	24	12
TS4	195/65(70、75) R16	Pebble	530	525	359	4.5	7	170/225	24	12
TS4-2		Pebble	550	525	388	4.5	7	170/225	24	12
PD500K		Pebble	620	615	389	5.0	6.9/9.5	231/152	15/21.4	14.5/10.2
PD601K		Pebble	690	615	459	5.0	6.9/9.6	231/152	15/21.5	14.5/10.3
ZP414K		Pebble	284	514	428	6.35	7.54/9.53	231/152	15/21.5	14.5/10.3
B225R17-1(2)	225/55R17	Pebble	427	520.7	366	4.5	9.551	336.55	21.88	11.66
B825-20-1	8.25-20	Pebble	558	500	518	9.5	13.0	360	27.5	14.5
B265-25-2	26.5-25	Pebble	1356	890	1230	14.0	23.0	470	36.0	15.5
BK4650		Pebble	1101	1200	1020	12.5	14	975	34	16
1E25		Pebble	387	180	349	6	7.5	90	16.5	7
P408		Pebble	394	495	316	6.4	9.5	286	21.4	11.6
P350		Pebble	324	444	228	4.0	9.5	235	21.4	11.7
P327		Pebble	311	406	203	4.0	9.5	197	21.4	11.7
P420		Pebble	400	508	342	6.4	9.5	311	21.4	11.6
B165R13-4	165/70R13	Pebble	364	450	231	4.0	7.5	234	21	12
B235R17-1	235/45R17、215/50R17	Pebble	392	516	330	4.5	9.551	336.55	21.88	11.66
B235R18-2	235/50(60、55) R18	Pebble	432	572	356	4.5	9.551	360	21.88	11.66
B245R19-1	235/55R19、245/45(55)R19	Pebble	458	562	400	4.5	9.551	387	21.88	11.66
B265R19-1	255/50R19、265/50(55)R19	Pebble	473	584	402	4.5	9.551	387	21.88	11.66
RB145-1		Pebble	341	372	274	6.8	9.0	230.0	20.0	10.0
RB15-1		Pebble	495	580	376	5.0	8.0	280.0	22.0	12.0
RB15-2	195/65R15	Pebble	384	500	305	5.0	8.0	285.0	21.0	12.0

TARAY INTERNATIONAL CORPORATION

NEW BLADDER SIZES

INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
JTB1651		Pebble	389	485	270	5.0	7.0	248.0	21.0	12.0
JTB1703		Pebble	356	475	320	5.0	8.0	336.0	24.0	12.0
B245R19-2	245/35R19	Pebble	380	520	334	4.2	7.000	380	24.00	12.70
B265R17-1	255/65R17、265/65(70)R17	Pebble	520	620	412	4.5	9.500	336	21.00	12.00
B265R195-1	265/70R19.5	Pebble	569	660	440	6.0	12.000	340	26.00	13.00
B305R26-1	305/35R26、295/35R26	Pebble	440	670	400	5.0	7.000	555	24.00	14.00
B25X12-12-1	25X12-12	Pebble	592	360	546	6.0	9.000	220	22.00	12.50
B145R12-3		Pebble	334	465	235	5	7.5	224	21	13
BR14-1		Pebble	374	470	266	5	9.5	250	22	13
B14.9-30-1	14.9-30	Pebble	765	890	662	12	16	600	29	14
B11-32-1	11-32	Pebble	624	900	551	12	12.7	678	29	13.5
RB1601	7.00R16C、215/75R16C	Pebble	460	590	346	6	8	310	21	12
B215R19-1	215/35R19	Pebble	334	500	288	5	7	380	24	12.7
B235R19-1	235(225)/35R19	Pebble	360	500	314	5	7	380	24	12.7
B245R20-1	245/35R20	Pebble	404	570	346	4.5	8	396	24	12.5
B245R20-1(2)	245/35R20	Pebble	404	570	346	6	8	396	24	12.5
B255R20-1		Pebble	490	600	426	4.5	8	396	24	12.5
B255R20-1(2)		Pebble	490	600	426	6	8	396	24	12.5
B275R20-1	275/40(45)R20	Pebble	460	600	402	4.5	8	403	24	12.7
B305R22-1	305/40R22	Pebble	500	656	440	4.5	8	454	24	12.7
B305R22-1(2)	305/40R22	Pebble	500	656	440	6	8	454	24	12.7
B155R12-1	145/70R12、155/55R12	Pebble	310	408	240	5	7	224	21	12
B195R15-1	185/55R15、195/50R15	Pebble	344	450	278	5	10	285	21	11.7
B225R16-2(2)	225/60R16	Pebble	464	540	360	4.0	8.5	272	22.0	12.7
B435R195-1	435/50R19.5	Pocked	775	720	628	6	12	340	26	13
B445R195-1	445/45R19.5	Pocked	744	690	608	6	12	340	26	13
B255R225-1	255/70R22.5	Pocked	550	720	440	6	12	432	28	14

TARAY INTERNATIONAL CORPORATION

NEW BLADDER SIZES

INJECTION (ABR) BLADDERS	Applied Tyre Section	Vents/ Etching Type	Bladder Dimension					Mounting Dimension		
			Effective Periphery LB (mm)	O.D. DB (mm)	Overall Height HB (mm)	Crown Gauge to (mm)	Neck Gauge to' (mm)	Foot ID Db (mm)	Foot Height a (mm)	Foot Width b (mm)
B385R225-2	385/55R22.5、455/40R22.5	Pocked	706	772	584	6	12	432	28	14
B445R225-1	445/50R22.5	Pocked	746	790	636	6	12	432	28	14
AB1200R20-1		Pebble	752	850	548	8	14/8	383/120	23/43	23/14
AB1400R20-1		Pebble	886	960	611	8	14/8	383/120	23/43	23/14
AB1400R24-1		Pebble	997	1040	692	8	14/8	383/120	23/43	23/14
B50R57-1	50.00/85R57	Pebble	2700	2760	1936	13	22.23	1135	38.1	15.24
B1000R20-11	10.00/11.0R20	Pocked	670	830	480	8.0	12.0	380	26.0	14.0
18-J-378	235/45R18	Pocked	393.00	530.00	340.00	4.00	11.00	360.00	24.80	13.20
16-J-490	7.50R16/ 8.25R16	Pocked	468.00	600.00	385.00	4.50	13.00	310.00	25.00	13.00
16-J-540		Pocked	544.00	650.00	414.00	4.50	13.00	310.00	25.00	13.00
20-J-650	10.00/11.00R20	Pocked	650.00	780.00	506.00	6.50	12.70	384.20	28.40	12.70
20-J-680	11.00R20	Pocked	696.00	830.00	496.00	6.80	12.70	384.20	28.40	12.70
22.5-J-650		Pocked	658.00	810.00	516.00	6.80	12.70	434.00	28.40	12.70